


02-25-00

A

02/24/00



JC760 U.S. PTO

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR § 1.53(b))

Attorney Docket No.	2000B009		
Inventor(s) or Application Number	TENG XU JEFFREY L. WHITE		
Title	CATALYST PRETREATMENT IN AN OXYGENATE TO OLEFINS REACTION SYSTEM		
Express Mail Label No.	EL063715335US		

## APPLICATION ELEMENTS

 ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages 34  
(preferred arrangement set forth below)
- Descriptive title of the Invention
  - Cross References to Related Applications (if any)
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) Total Sheets 5  
(Informal)
4. Oath or Declaration Total Pages 2
- a. ☒ New unsigned (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d)  
(for continuation/division with Box 15 completed)  
[Note Box 5]
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4B is checked)  
The entire disclosure of the prior application, from which a copy of the oath or  
declaration is supplied under Box 4b, is considered to be part of the disclosure of the  
accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)

## ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449  
☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
14. ☐ Other:

15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment.

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

of prior application No: \_\_\_\_\_, from which priority is claimed under 35 U.S.C. § 120

Prior application information: Examiner \_\_\_\_\_ Group Art Unit \_\_\_\_\_

16. If a NONPROVISIONAL APPLICATION based upon a foreign or U.S. provisional application, priority is claimed from application

No. \_\_\_\_\_, country \_\_\_\_\_, filed on \_\_\_\_\_.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Labelor ☒ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name	ExxonMobil Chemical Company						
Address	P.O. Box 2149						
City	Baytown	State	Texas	Zip Code	77522		
Country	U.S.A.		Telephone	281-834-1978		Fax	281-834-2911
Name (print/type)	Bradley A. Keller			Registration No. (Attorney)	37,654		
Signature				Date	February 24, 2000		

**CATALYST PRETREATMENT  
IN AN OXYGENATE TO OLEFINS REACTION SYSTEM**

5

**Field of the Invention**

This invention relates to introducing a hydrocarbon into the porous framework of a silicoaluminophosphate molecular sieve. More specifically, this invention is to a silicoaluminophosphate molecular sieve which contains an aromatic compound, and a method for forming said aromatic compound within the porous framework of the silicoaluminophosphate molecular sieve.

15

**Background of the Invention**

Demand for polyolefins, e.g., polyethylene and polypropylene, has been steadily increasing. It is projected that the increased demand for polyolefins will outpace the availability of raw materials, e.g., ethylene and propylene, from which polyolefins can be made.

20

Olefins which are used to make polyolefins have been traditionally produced from petroleum feedstocks by either catalytic or steam cracking of the petroleum. The cost of petroleum cracking has steadily increased, however, making it important to find alternative feedstock sources for olefins.

25

Oxygenates are a promising alternative feedstock for making olefins. Particularly promising oxygenate feedstocks are alcohols, such as methanol and ethanol, dimethyl ether, methyl ethyl ether, diethyl ether, dimethyl carbonate, and methyl formate. Many of these oxygenates can be produced by fermentation, or from synthesis gas derived from natural gas, petroleum liquids, carbonaceous materials such as coal, recycled plastics, municipal wastes, or any appropriate organic material. Because of the wide variety of sources, oxygenates have promise as an economical source for olefin production.

30

One way in which olefins can be made is by catalytic conversion. In U.S. Patent No. 4,499,327, for example, a catalytic process for converting methanol to

olefins is disclosed. The catalyst used in that process contains a silicoaluminophosphate molecular sieve.

Of course, it is highly desirable to convert as much of the oxygenate feedstock as possible into as much olefin product as possible. Various methods of doing such have been described. For example, U.S. Patent No. 4,677,242 describes a method of increasing the amount of ethylene and propylene produced from the catalytic conversion of methanol by adding an aromatic diluent to the methanol. The catalyst that is used in the process contains a silicoaluminophosphate molecular sieve. The use of the diluent is considered to result in an increased amount of ethylene product.

U.S. Patent No. 4,499,314 discloses a catalytic process for converting methanol to ethylene and para-xylene. The catalyst that is used is ZSM-5. Promoters are used to promote either the formation of aromatics products or olefins products. Benzene, toluene and para-xylene are preferred aromatics promoters. Ethylene, propylene and butenes are preferred olefin promoters.

There remains, nevertheless, a desire to improve the economic attractiveness of the oxygenate conversion process. Catalysts and methods to produce olefins from oxygenates are needed which increase the selectivity of the oxygenate conversion reaction, particularly to ethylene and propylene, without resorting to adding costly product enhancing promoters. In particular, it is desirable to avoid using aromatic olefin promoters to boost selectivity to ethylene and propylene.

### **Summary of the Invention**

25

In order to overcome the various problems associated with providing large quantities of olefin product which can ultimately be used in the manufacture of polyolefin compositions, this invention provides a crystalline silicoaluminophosphate molecular sieve comprising a porous framework structure. Within the porous framework structure there is contained a catalytically active integrated hydrocarbon co-catalyst.

30

In a preferred embodiment, the invention provides a method of making an integrated hydrocarbon co-catalyst, comprising preparing an silicoaluminophosphate molecular sieve having a porous framework structure and contacting said silicoaluminophosphate with a hydrocarbon at conditions effective  
5 to form at least said integrated hydrocarbon co-catalyst within the porous framework, wherein said the silicoaluminophosphate has a catalytic activity index for methanol conversion at 250°C of at least 2.

The integrated hydrocarbon co-catalyst is a carbonaceous material such that the silicoaluminophosphate molecular sieve containing the integrated  
10 hydrocarbon co-catalyst has a catalytic activity index for methanol conversion at 250°C of at least 2. The catalytic activity index is  $k/k_{ini}$ , where  $k$  is the pseudo-first order rate constant for methanol conversion at 250°C in the presence of the crystalline silicoaluminophosphate molecular sieve and  $k_{ini}$  is the pseudo-first order rate constant for methanol conversion at 250°C by injecting 1 pulse of 3  
15 microliter of methanol in a pre-calcined crystalline silicoaluminophosphate molecular sieve activated by flowing He at 450°C for 1 hour.

In another embodiment, there is provided a catalyst for converting an oxygenate feedstock to an olefin product. The catalyst comprises a crystalline silicoaluminophosphate molecular sieve having a porous framework structure, and  
20 a binder, wherein the porous framework structure contains an integrated hydrocarbon co-catalyst preferably containing a single ring aromatic compound.

In preferred embodiments of the silicoaluminophosphate molecular sieve and catalyst, the aromatic composition exhibits a Solid State Nuclear Magnetic Resonance (SSNMR) spectra having a peak in the 18-22 ppm region and a peak in  
25 the 125-140 ppm region. Preferably, the aromatic composition is selected from the group consisting of alkyl substituted, single ring aromatics. Alternatively, if the intensity of the peak in the 18-22 ppm region is negligible, a peak near 128 ppm also indicates the material of this invention. Such a peak represents the presence of benzene, which has the desired effect on catalytic activity, as it  
30 rapidly reacts with the oxygenate to make alkylated single ring aromatics. More preferably, the silicoaluminophosphate molecular sieve is selected from the group consisting of SAPO-5, SAPO-8, SAPO-11, SAPO-16, SAPO-17, SAPO-18,

SAPO-20, SAPO-31, SAPO-34, SAPO-35, SAPO-36, SAPO-37, SAPO-40, SAPO-41, SAPO-42, SAPO-44, SAPO-47, SAPO-56, the metal containing forms thereof, and mixtures thereof. The most preferred silicoaluminophosphate molecular sieve is SAPO-34.

- 5           Also provided in this invention is a method for making an olefin product from an oxygenate feedstock. The method comprises introducing a hydrocarbon into a porous framework of a silicoaluminophosphate molecular sieve under conditions effective to form an integrated hydrocarbon co-catalyst preferably containing a single ring aromatic compound, and contacting the
- 10   silicoaluminophosphate molecular sieve containing the integrated hydrocarbon co-catalyst with an oxygenate feedstock under conditions effective to convert the feedstock to an olefin product. The invention includes the olefin product made according to the described method.

- In another preferred embodiment, the invention provides a method wherein
- 15   the olefin product is contacted with a polyolefin-forming catalyst under conditions effective to form a polyolefin. The invention includes the polyolefin product made according to the described method.

- In a more preferred embodiment, there is provided an olefin composition. The olefin composition comprises C<sub>2</sub> to C<sub>4</sub> hydrocarbons such as ethylene,
- 20   propylene and butene.

#### **Brief Description of the Drawings**

- The present invention will be better understood by reference to the
- 25   Detailed Description of the Invention when taken together with the attached drawings, wherein:

          FIG. 1 is a diagram of the pulse reactor for measuring the catalytic activity index.

- FIG. 2 is a plot comparing conversion of methanol by contacting methanol
- 30   to SAPO catalysts with and without an integrated hydrocarbon co-catalyst;

FIG. 3 is a plot of olefin selectivity for methanol reactions by contacting methanol to SAPO catalysts with and without an integrated hydrocarbon co-catalyst;

FIG. 4 is a SSNMR spectrum of SAPO-34 catalyst containing alkylated single ring aromatics within the porous framework; and

FIG. 5 is a SSNMR spectrum of SAPO-34 catalyst containing various hydrocarbons and alkylated single ring aromatics within the porous framework at various conditions.

## 10 **Detailed Description of the Invention**

Silicoaluminophosphate (SAPO) molecular sieves serve as particularly desirable catalytic materials in converting oxygenate feedstocks to olefin compositions. They are particularly good catalysts for making olefins such as ethylene and propylene from oxygenate compounds.

According to this invention, significant quantities of ethylene and propylene can be produced from oxygenate feedstreams using SAPO molecular sieves if hydrocarbon material is introduced into the porous framework of the silicoaluminophosphate molecular sieves under the appropriate conditions, then contacted with feedstock. Once the silicoaluminophosphate molecular sieve contains a measurable quantity of a catalytically active integrated hydrocarbon co-catalyst, which may be at least one single ring aromatic compound, oxygenate contacting the silicoaluminophosphate molecular sieve at appropriate reaction conditions will be converted to form a product that has a substantial quantity of ethylene and propylene relative to what has been previously achievable. The product will typically be high in ethylene content relative to propylene.

According to this invention, the catalytically active integrated hydrocarbon co-catalyst is a product of a reaction of a hydrocarbon in contact with the porous framework structure of the silicoaluminophosphate molecular sieve and the silicoaluminophosphate has a catalytic activity index for methanol conversion at 250°C of at least 2, preferably at least 5, more preferably at least 10.

This invention provides a method of making an integrated hydrocarbon co-catalyst, comprising preparing an silicoaluminophosphate molecular sieve having a porous framework structure and contacting said silicoaluminophosphate with a hydrocarbon at conditions effective to form at least said integrated hydrocarbon co-catalyst within the porous framework, wherein said the silicoaluminophosphate has a catalytic activity index for methanol conversion at 250°C of at least 2, preferably at least 5, more preferably at least 10.

The conditions effective to form at least the integrated hydrocarbon co-catalyst comprises contacting a hydrocarbon having a diameter less than a pore-mouth diameter of the crystalline silicoaluminophosphate molecular sieve. This contacting could comprise first contacting at a lower temperature and second contacting at a higher temperature. The difference between said higher temperature and said lower temperature is at least 10°C, preferably at least 25°C. The hydrocarbon contacted in the first contacting could be different from that contacted in the second contacting.

The oxygenate feedstock of this invention comprises at least one organic compound which contains at least one oxygen atom, such as aliphatic alcohols, ethers, carbonyl compounds (aldehydes, ketones, carboxylic acids, carbonates, esters and the like), and the feedstock may optionally contain at least one compound containing a halide, mercaptan, sulfide, or amine, as long as the optional components do not significantly impede the performance of the catalyst. When the oxygenate is an alcohol, the alcohol can include an aliphatic moiety having from 1 to 10 carbon atoms, more preferably from 1 to 4 carbon atoms. Representative alcohols include but are not necessarily limited to lower straight and branched chain aliphatic alcohols, their unsaturated counterparts and the nitrogen, halogen and sulfur analogues of such. Examples of suitable oxygenate compounds include, but are not limited to: methanol; ethanol; n-propanol; isopropanol; C<sub>4</sub> - C<sub>20</sub> alcohols; methyl ethyl ether; dimethyl ether; diethyl ether; di-isopropyl ether; formaldehyde; dimethyl carbonate; dimethyl ketone; acetic acid; and mixtures thereof. Preferred oxygenate compounds are methanol, dimethyl ether, or a mixture thereof.

The method of making the preferred olefin product in this invention can include the process of making these compositions from hydrocarbons such as oil, coal, tar sand, shale, biomass and natural gas. Methods for making the compositions are known in the art. These methods include fermentation to  
5 alcohol or ether, making synthesis gas, then converting the synthesis gas to alcohol or ether. Synthesis gas can be produced by known processes such as steam reforming, autothermal reforming and partial oxidization.

One or more inert diluents may be added with the feedstock, for example, in an amount of from 1 to 99 molar percent, based on the total number of moles of  
10 all feed and diluent components fed to the reaction zone. For purposes of this invention, diluents are inert compositions that do not participate in the oxygenate conversion reaction, i.e., they are neither created nor consumed. Typical diluents include helium, argon, nitrogen, carbon monoxide, carbon dioxide, water, and mixtures thereof. The preferred diluents are water and nitrogen. Water can be  
15 injected in either liquid or vapor form.

Hydrocarbons other than oxygenates can also be included as part of the feedstock, i.e., as co-feed. These hydrocarbons can include olefins, paraffins, alkylaromatics, aromatics or mixtures thereof. Preferred hydrocarbon co-feeds include, butylene, pentylene,  $C_4^+$ ,  $C_5^+$ , and mixtures thereof. More preferred as a  
20 co-feed is  $C_4^+$ , with the most preferred being  $C_4^+$  which is obtained from separation and recycle of reactor product.

The silicoaluminophosphate molecular sieves of this invention comprise a three-dimensional microporous crystal framework structure of  $[SiO_2]$ ,  $[AlO_2]$  and  $[PO_2]$  tetrahedral units. The way Si is incorporated into the structure can be  
25 determined by  $^{29}Si$  MAS NMR. See Blackwell and Patton, *J. Phys. Chem.*, 92, 3965 (1988). The desired SAPO molecular sieves will exhibit one or more peaks in the  $^{29}Si$  MAS NMR, with a chemical shift  $[(Si)]$  in the range of -88 to -94 ppm and with a combined peak area in that range of at least 20% of the total peak area of all peaks with a chemical shift  $[(Si)]$  in the range of -88 ppm to -115 ppm, where  
30 the  $[(Si)]$  chemical shifts refer to external tetramethylsilane (TMS).



Silicoaluminophosphate molecular sieves are generally classified as being microporous materials having 8, 10, or 12 membered ring structures. These ring structures can have an average pore size ranging from about 3.5-15 angstroms. Preferred are the small pore SAPO molecular sieves having an average pore size  
5 ranging from about 3.5 to 5 angstroms, more preferably from 4.0 to 5.0 angstroms. These preferred pore sizes are typical of molecular sieves having 8 membered rings.

In general, silicoaluminophosphate molecular sieves comprise a molecular framework of corner-sharing  $[\text{SiO}_2]$ ,  $[\text{AlO}_2]$ , and  $[\text{PO}_2]$  tetrahedral units. This  
10 type of framework is effective in converting various oxygenates into olefin products.

The  $[\text{PO}_2]$  tetrahedral units within the framework structure of the silicoaluminophosphate molecular sieve of this invention can be provided by a variety of compositions. Examples of these phosphorus-containing compositions  
15 include phosphoric acid, organic phosphates such as triethyl phosphate, and aluminophosphates. The phosphorous-containing compositions are mixed with reactive silicon and aluminum-containing compositions under the appropriate conditions to form the silicoaluminophosphate molecular sieve.

The  $[\text{AlO}_2]$  tetrahedral units within the framework structure can be provided by a variety of compositions. Examples of these aluminum-containing  
20 compositions include aluminum alkoxides such as aluminum isopropoxide, aluminum phosphates, aluminum hydroxide, sodium aluminate, and pseudoboehmite. The aluminum-containing compositions are mixed with reactive silicon and phosphorus-containing compositions under the appropriate conditions  
25 to form the silicoaluminophosphate molecular sieve.

The  $[\text{SiO}_2]$  tetrahedral units within the framework structure can be provided by a variety of compositions. Examples of these silicon-containing  
30 compositions include silica sols and silicium alkoxides such as tetra ethyl orthosilicate. The silicon-containing compositions are mixed with reactive aluminum and phosphorus-containing compositions under the appropriate conditions to form the silicoaluminophosphate molecular sieve.

Substituted SAPOs can also be used in this invention. These compounds are generally known as MeAPSOs or metal-containing silicoaluminophosphates. The metal can be alkali metal ions (Group IA), alkaline earth metal ions (Group IIA), rare earth ions (Group IIIB, including the lanthanoid elements: lanthanum, cerium, praseodymium, neodymium, samarium, europium, gadolinium, terbium, dysprosium, holmium, erbium, thulium, ytterbium and lutetium; and scandium or yttrium) and the additional transition cations of Groups IVB, VB, VIB, VIIB, VIIIB, and IB.

Preferably, the Me represents atoms such as Zn, Mg, Mn, Co, Ni, Ga, Fe, Ti, Zr, Ge, Sn, and Cr. These atoms can be inserted into the tetrahedral framework through a [MeO<sub>2</sub>] tetrahedral unit. The [MeO<sub>2</sub>] tetrahedral unit carries a net electric charge depending on the valence state of the metal substituent. When the metal component has a valence state of +2, +3, +4, +5, or +6, the net electric charge is between -2 and +3. Incorporation of the metal component is typically accomplished adding the metal component during synthesis of the silicoaluminophosphate molecular sieve. However, post-synthesis ion exchange can also be used.

Suitable silicoaluminophosphate molecular sieves include SAPO-5, SAPO-8, SAPO-11, SAPO-16, SAPO-17, SAPO-18, SAPO-20, SAPO-31, SAPO-34, SAPO-35, SAPO-36, SAPO-37, SAPO-40, SAPO-41, SAPO-42, SAPO-44, SAPO-47, SAPO-56, the metal containing forms thereof, and mixtures thereof. Preferred are SAPO-18, SAPO-34, SAPO-35, SAPO-44, and SAPO-47, particularly SAPO-18 and SAPO-34, including the metal containing forms thereof, and mixtures thereof. As used herein, the term mixture is synonymous with combination and is considered a composition of matter having two or more components in varying proportions, regardless of their physical state.

The silicoaluminophosphate molecular sieves are synthesized by hydrothermal crystallization methods generally known in the art. See, for example, U.S. Pat. Nos. 4,440,871; 4,861,743; 5,096,684; and 5,126,308, the methods of making of which are fully incorporated herein by reference. A reaction mixture is formed by mixing together reactive silicon, aluminum and phosphorus components, along with at least one template. Generally the mixture

is sealed and heated, preferably under autogenous pressure, to a temperature of at least 100°C, preferably from 100-250°C, until a crystalline product is formed.

Formation of the crystalline product can take anywhere from around 2 hours to as much as 2 weeks. In some cases, stirring or seeding with crystalline material will  
5 facilitate the formation of the product.

Typically, the silicoaluminophosphate molecular sieve product will be formed in solution. It can be recovered by standard means, however, such as by centrifugation or filtration. The product can also be washed, recovered by the same means and dried.

10 As a result of the crystallization process, the recovered sieve contains within its pores at least a portion of the template used in making the initial reaction mixture. The crystalline structure essentially wraps around the template, and the template must be removed to obtain catalytic activity. Once the template is removed, the crystalline structure that remains has what is typically called an  
15 intracrystalline pore system.

The SAPO molecular sieve can contain one or more templates. Templates are structure directing agents, and typically contain nitrogen, phosphorus, oxygen, carbon, hydrogen or a combination thereof, and can also contain at least one alkyl or aryl group, with 1 to 8 carbons being present in the alkyl or aryl group.

20 Mixtures of two or more templates can produce mixtures of different sieves or predominantly one sieve where one template is more strongly directing than another.

Representative templates include tetraethyl ammonium salts, cyclopentylamine, aminomethyl cyclohexane, piperidine, triethylamine,  
25 cyclohexylamine, tri-ethyl hydroxyethylamine, morpholine, dipropylamine (DPA), pyridine, isopropylamine and combinations thereof. Preferred templates are triethylamine, cyclohexylamine, piperidine, pyridine, isopropylamine, tetraethyl ammonium salts, and mixtures thereof. The tetraethylammonium salts include tetraethyl ammonium hydroxide (TEAOH), tetraethyl ammonium  
30 phosphate, tetraethyl ammonium fluoride, tetraethyl ammonium bromide, tetraethyl ammonium chloride, tetraethyl ammonium acetate. Preferred tetraethyl

ammonium salts are tetraethyl ammonium hydroxide and tetraethyl ammonium phosphate.

As is known in the art, molecular sieve or catalyst containing the silicoaluminophosphate molecular sieve, must be activated prior to use in a catalytic process. As used herein the activation of a molecular sieve or a catalyst containing the silicoaluminophosphate molecular sieve means that template is removed from the porous structure of the silicoaluminophosphate molecular sieve, leaving active catalytic sites with the microporous channels of the silicoaluminophosphate molecular sieve open for contact with feed. The activation process is typically accomplished by calcining, or essentially heating the template at a temperature of from 200 to 800°C in the presence of an oxygen-containing gas. In some cases, it may be desirable to heat in an environment having a low oxygen concentration. This type of process can be used for partial or complete removal of the template from the intracrystalline pore system. In other cases, particularly with smaller templates, complete or partial removal from the sieve can be accomplished by conventional desorption processes such as those used in making standard zeolites.

Once the template has been removed from the silicoaluminophosphate molecular sieve or catalyst containing the silicoaluminophosphate molecular sieve, hydrocarbon material is contacted with the silicoaluminophosphate molecular sieve in a pretreatment zone. The pretreatment zone is operated at conditions effective to form an integrated hydrocarbon co-catalyst which may be at least one single ring aromatic compound within the silicoaluminophosphate molecular sieve. After the an integrated hydrocarbon co-catalyst has been formed, the silicoaluminophosphate molecular sieve is contacted with oxygenate feedstock in a reaction zone under conditions effective to convert the oxygenate to an olefin-containing product. Once the catalyst is pretreated and the an integrated hydrocarbon co-catalyst is formed within the pore structure of the silicoaluminophosphate molecular sieve, it can be allowed to stand for some time in the absence of hydrocarbon or oxygenate feed. It is preferable, however, to maintain the pretreated catalyst in an inert environment if there is to be an extended time before the pretreated catalyst is contacted with oxygenate feed.

The hydrocarbon material contacted with and introduced into the silicoaluminophosphate molecular sieve must be small enough to be adsorbed into the porous framework structure of the silicoaluminophosphate molecular sieve. In general, the hydrocarbon material will comprise at least one hydrocarbon  
5 compound which has a kinetic diameter less than the size of the pore mouth opening of the SAPO molecular sieve.

The hydrocarbon material that is contacted with or introduced into the silicoaluminophosphate molecular sieve must be capable of being converted to an integrated hydrocarbon co-catalyst which may be a single ring aromatic  
10 compound. The desired aromatic composition can be identified by Solid State Nuclear Magnetic Resonance (SSNMR) spectra comprising a peak in the 18-40 ppm region and a peak in the 120-150 ppm region. Preferably, the aromatic composition is selected from the group consisting of alkyl substituted, single ring aromatics. Alternatively, if the intensity of the peak in the 18-40 ppm region is  
15 negligible, a single peak near 128 ppm also indicates a useful material of this invention, as this indicates the presence of benzene. Benzene also has the desired effect on catalytic activity, as it rapidly reacts with the oxygenate to make alkylated single ring aromatics.

Preferably the an integrated hydrocarbon co-catalyst which may be a  
20 single ring aromatic within the silicoaluminophosphate molecular sieve or catalyst containing the silicoaluminophosphate molecular sieve will exhibit a ratio of the intensity of the peak in the 18-40 ppm region to the intensity of the peak in the 120-150 ppm region of not greater than 1.0. More preferably, the an integrated hydrocarbon co-catalyst which may be a single ring aromatic within the  
25 silicoaluminophosphate molecular sieve or catalyst containing the silicoaluminophosphate molecular sieve will exhibit a ratio of the intensity of the peak in the 18-40 ppm region to the intensity of the peak in the 120-150 ppm region of between about 0.15 and about 0.7.

It is desirable that the an integrated hydrocarbon co-catalyst which may be  
30 a single ring aromatic compound be present within the porous structure of the silicoaluminophosphate molecular sieve in an amount effective to enhance the conversion of oxygenate feed to olefin product, particularly at a concentration

effective to enhance selectivity to ethylene and/or propylene. The an integrated hydrocarbon co-catalyst which may be a single ring aromatic can be part of a hydrocarbon composition within the porous structure of the

silicoaluminophosphate molecular sieve, and the hydrocarbon composition

- 5 comprising the an integrated hydrocarbon co-catalyst which may be a single ring aromatic will be present at about 0.1-23 wt% based on the total weight of the silicoaluminophosphate molecular sieve.

Hydrocarbon is introduced into the silicoaluminophosphate molecular sieve by contacting the silicoaluminophosphate molecular sieve or catalyst

- 10 containing the silicoaluminophosphate molecular sieve with hydrocarbon in a pretreatment zone at conditions effective to form a composition comprising an integrated hydrocarbon co-catalyst which may be at least one single ring aromatic compound within the molecular pore structure of the silicoaluminophosphate molecular sieve. Within the pretreatment zone the conditions are such that an
- 15 amount of an integrated hydrocarbon co-catalyst which may be a single ring aromatic will be formed within the silicoaluminophosphate molecular sieve pore structure that is effective in enhancing selectivity to ethylene or propylene in an oxygenate to olefin reaction process. The activity of a pretreated catalyst for oxygenate conversion can be expected to increase by a factor of at least about
- 20 20% relative to an untreated catalyst. The selectivity to ethylene or propylene of a pretreated catalyst in the oxygenate conversion reaction can be expected to increase by at least about 2 wt. %. Preferably, the an integrated hydrocarbon co-catalyst which may be a single ring aromatic will occupy at least 0.1 vol.% of the pore structure; more preferably, at least 10 vol.%; most preferably, at least 25
- 25 vol.%. the molecular pore structure olefin will not be produced.

In general, the temperature in the pretreatment zone will be less than the temperature in the reaction zone. Desirably, there will be a temperature differential between the reaction zone and the pretreatment zone of greater than or equal to 10°C, preferably greater than or equal to 25°C, more preferably greater

30 than or equal to 50°C, most preferably greater than or equal to about 100°C.

In a preferred embodiment, the temperature in the pretreatment in the pretreatment zone will be not greater than 450°C, more preferably not greater than 400°C, most preferably not greater than 350°C. The preferred range of operation in the pretreatment zone is between 150°C and 450°C, more preferably between 200°C and 400°C, most preferably between 250°C and 350°C.

The pretreatment zone can be contained in a separate pretreatment vessel or within a reactor vessel where the catalytic conversion of oxygenate to olefin takes place. In a preferred embodiment, a separate pretreatment vessel will be used. Typically, the pretreatment vessel will be an auxiliary fluidized bed reactor associated with the oxygenate conversion reactor and regenerator system. The auxiliary reactor is capable of continuously receiving catalyst from the regenerator and subsequently supplying pretreated catalyst to the oxygenate conversion reactor.

When pretreatment is carried out within the same vessel where the catalytic conversion of oxygenate to olefin takes place, two separate temperature zones should be maintained in order to get proper introduction of hydrocarbon and formation of an integrated hydrocarbon co-catalyst which may be at least one single ring aromatic compound in the silicoaluminophosphate molecular sieve. This can be accomplished by introducing the catalyst to be pretreated into one zone of the oxygenate conversion reactor at one set of conditions in the absence of feed oxygenate, and subsequently introducing the pretreated catalyst and any unreacted pretreating hydrocarbon into an oxygenate conversion zone in fluid communication with the pretreatment zone. The feed oxygenate is then introduced to the oxygenate conversion zone at conditions to effect the oxygenate conversion reaction. Different conditions in the two zones may be maintained through control of the conditions at which the catalyst and feeds are introduced, including temperature, pressure or phase. Optionally, each zone may comprise heating or cooling functions such as steam or cooling water coils.

After pretreatment, the silicoaluminophosphate molecular sieve or catalyst containing the silicoaluminophosphate molecular sieve is contacted with feed containing an oxygenate, and optionally a diluent or a co-feed, at process

conditions effective to produce an olefin-containing product. The oxygenate to olefin reaction is carried out in a reaction zone, and the reaction zone is contained within a catalytic reactor.

Typically, the oxygenate feed is contacted with the catalyst when the oxygenate is in a vapor phase. Alternately, the process may be carried out in a liquid or a mixed vapor/liquid phase. When the process is carried out in a liquid phase or a mixed vapor/liquid phase, different conversions and selectivities of feed-to-product may result depending upon the catalyst and reaction conditions.

Olefins can generally be produced at a wide range of temperatures. An effective operating temperature range can be from about 200°C to 700°C. At the lower end of the temperature range, the formation of the desired olefin products may become markedly slow. At the upper end of the temperature range, the process may not form an optimum amount of product. In this invention, however, the oxygenate to olefin reaction process will be carried out a temperature differential between the reaction zone and the pretreatment zone of greater than or equal to 10°C. Preferably, the reaction process will be carried out at a temperature range between 350°C and 600°C, most preferably between 400°C and 550°C.

Examples of reactors which can be used in this invention include fluid bed reactors and concurrent riser reactors as described in "Free Fall Reactor," *Fluidization Engineering*, D. Kunii and O. Levenspiel, Robert E. Krieger Publishing Co. NY, 1977, expressly incorporated herein by reference. Additionally, countercurrent free fall reactors may be used in the conversion process as described in U.S. Pat. No. 4,068,136 and "Riser Reactor," *Fluidization and Fluid-Particle Systems*, pages 48-59, F.A. Zenz and D. F. Othmo, Reinhold Publishing Corp., NY 1960, the detailed descriptions of which are also expressly incorporated herein by reference.

When the reactor is a fluidized bed reactor, it is preferred that the reactor have a riser region and a dense fluid bed section. In this embodiment, the regenerated catalyst can be returned to the portion of the reactor above the dense phase region, immediately below the dense phase region, or anywhere between



about the top one fourth of the riser region and the bottom one fourth of the dense phase region.

The reaction can take place at a weight hourly space velocity (WHSV) of from 1  $\text{hr}^{-1}$  to 1000  $\text{hr}^{-1}$ . According to this invention, WHSV is defined as the weight of oxygenate, and any hydrocarbon which may be optionally added with the feed, per hour per weight of the silicoaluminophosphate molecular sieve content of the catalyst. Preferred reactors are co-current riser reactors and short contact time countercurrent free-fall reactors in which an oxygenate feedstock can be contacted with a molecular sieve catalyst at a WHSV of at least about 20  $\text{hr}^{-1}$ , preferably in the range of from about 20  $\text{hr}^{-1}$  to 500  $\text{hr}^{-1}$ , and most preferably in the range of from about 20  $\text{hr}^{-1}$  to 250  $\text{hr}^{-1}$ . Because the catalyst or the feedstock may contain other materials which act as inerts or diluents, the WHSV is calculated on the weight basis of the oxygenate feed, and any hydrocarbon which may be present, and the silicoaluminophosphate molecular sieve contained in the catalyst.

Effective pressures for both the pretreatment and the reaction process range from about 0.1 psia to about 500 psia. Preferred pressures are in the range of about 10 psia to about 250 psia, with the most preferred range being of from about 15 psia to about 200 psia. The foregoing pressures are inclusive of any inert diluent or additional hydrocarbon component, as well as the oxygenate compounds and/or mixtures thereof with hydrocarbon.

The residence time of the feed in the reaction zone may vary from fractions of a second to a number of hours, determined largely by the reaction temperature, the pressure, the silicoaluminophosphate molecular sieve catalyst selected, the WHSV, the phase (liquid or vapor), and the process design characteristics.

In the process of this invention, all or part of the catalyst suffers deactivation as a result of carbonaceous deposits forming on the catalyst during the olefin conversion reaction. The catalyst is, therefore, periodically regenerated by contacting it with a regeneration medium to remove all or part of such carbonaceous deposits. This regeneration may occur periodically within the reactor by ceasing the flow of feed to the reactor, introducing a regeneration

medium, ceasing flow of the regeneration medium, and then reintroducing the feed to the fully or partially regenerated catalyst. Regeneration preferably occurs periodically or continuously outside the reactor by removing a portion of the deactivated catalyst to a separate regenerator, and subsequently reintroducing the regenerated catalyst to the reactor. Periodic regeneration may occur at times and conditions needed to maintain a level of activity of the entire catalyst within the reactor.

According to one of the preferred embodiments of this invention, the catalyst containing carbonaceous material is regenerated under conditions effective to obtain a regenerated catalyst having a carbonaceous content of less than 2 wt.%, preferably less than 1.5 wt.%, and most preferably less than 1.0 wt.%. Following regeneration, the catalyst is preferably sent to the pretreatment zone.

In order to make up for any catalyst loss during the regeneration or reaction process, fresh catalyst can be added. Preferably, the fresh catalyst is added to the regenerated catalyst after it is removed from the regenerator, and then both are contacted with hydrocarbon material to form a composition comprising an integrated hydrocarbon co-catalyst which may be a single ring aromatic compound. However, the fresh catalyst can be pretreated independently of the regenerated catalyst, or added directly to the reaction zone without pretreatment.

In a preferred embodiment of the continuous operation, only a portion of the catalyst is removed from the reactor and sent to the regenerator to remove the accumulated carbonaceous deposits that result during the catalytic reaction. In the regenerator, the catalyst is contacted with a regeneration medium containing oxygen or other oxidants. Examples of other oxidants include  $O_3$ ,  $SO_3$ ,  $N_2O$ ,  $NO$ ,  $NO_2$ ,  $N_2O_5$ , and mixtures thereof. It is preferred to supply  $O_2$  in the form of air. The air can be diluted with nitrogen,  $CO_2$ , or flue gas, and steam may be added. Desirably, the  $O_2$  concentration in the regenerator is reduced to a controlled level to minimize overheating or the creation of hot spots in the spent or deactivated catalyst. The deactivated catalyst also may be regenerated reductively with  $H_2$ ,  $CO$ , mixtures thereof, or other suitable reducing agents. A combination of oxidative regeneration and reductive regeneration can also be employed.

In essence, the carbonaceous deposits are removed from the catalyst during the regeneration process, forming a regenerated catalyst. The regenerated catalyst is then sent to the pretreatment zone for forming an aromatic composition within the silicoaluminophosphate molecular sieve, although some of the regenerated catalyst can be sent directly to the reaction zone for catalytic contact with the feed. Typical regeneration temperatures are in the range of 350-800°C, desirably in the range of 400-750°C. Preferably, regeneration is carried out at a temperature range of 450-700°C.

It is desirable to strip at least some of the volatile organic components which may be adsorbed onto the catalyst or located within its microporous structure prior to entering the regenerator. This can be accomplished by passing a stripping gas over the catalyst in a stripper or stripping chamber, which can be located within the reactor vessel or in a separate vessel. The stripping gas can be any substantially inert medium that is commonly used. Examples of stripping gas are steam, nitrogen, helium, argon, methane, CO<sub>2</sub>, CO, and flue gas.

It may be desirable to cool at least a portion of the regenerated catalyst to a lower temperature before it is sent to the pretreatment zone or the reaction zone. A heat exchanger located externally to the regenerator may be used to remove some heat from the catalyst after it has been withdrawn from the regenerator. When the regenerated catalyst is cooled, it is desirable to cool it to a temperature which is from about 200°C higher to about 200°C lower than the temperature of the catalyst withdrawn from the reactor. More desirably, it is cooled to a temperature from about 10-200°C lower than the temperature of the catalyst withdrawn from the reactor vessel. This cooled catalyst then may be sent to the pretreatment zone or the reaction zone, or it may be recycled back to the regenerator. Introducing the cooled catalyst into the pretreatment zone, the reaction zone or the regenerator serves to reduce the average temperature in the pretreatment zone, reaction zone or regenerator.

In a preferred embodiment of the invention, an average gas superficial velocity of greater than about 1 meter per second (m/s) is maintained in the reaction zone. Preferably, the average gas superficial velocity is greater than

about 2 m/s. More preferably, the average gas superficial velocity is between a range of 2-6 m/s.

As defined herein, gas superficial velocity is the volumetric flow rate of the feedstock (including oxygenate, hydrocarbon, and any diluent divided by the cross-sectional area of reaction zone. Since feedstock is converted to olefin product while flowing through the reaction zone, the volumetric flow rate of the feedstock varies throughout the reaction zone. In addition, depending upon reactor design, the cross-sectional area of the reaction zone may also vary at any given point within the reactor. Therefore, average gas superficial velocity as used herein represents the average gas superficial velocity throughout the reaction zone.

When the average gas superficial velocity is greater than about 1 m/s, back-mixing of gases in the reaction is minimized. This increases the selectivity to the desired light olefins, i.e., ethylene and /or propylene, and increases the approach to plug flow behavior of the gases flowing through the reaction zone. The velocity profile at a given cross section of the reaction zone is approximately flat and there is little axial diffusion or back-mixing of fluid elements. Ideal plug flow behavior occurs when elements of the homogeneous fluid reactant move through a reaction zone as plugs moving parallel to the reactor axis.

In order to maintain plug flow behavior, as well as achieve relatively isothermal conditions within the reaction zone, it may be beneficial to recirculate a portion of the catalyst exiting the reaction zone to recontact the feed. This recirculation may occur either within the reaction zone or outside the reaction zone. Recirculating the catalyst serves to decrease the temperature differential in the reaction zone by absorbing a portion of the heat generated by the conversion reaction. The temperature differential of the reaction zone is the change in temperature from the inlet to the outlet of the reaction zone. The outlet is the portion of the reaction zone at which the reactants (feed, catalyst and products) pass from the reaction zone to a catalyst disengaging zone. In this preferred embodiment, the temperature differential across the reaction zone is less than about 120°C, which is the practical limit of what could be considered near isothermal conditions in a continuously operating system. Preferably, the

temperature differential is maintained at less than about 100°C. More preferably, the temperature differential is less than about 30°C.

Desirably, catalyst is recirculated to contact the feed. Preferably, the rate of catalyst, which comprises molecular sieve and other materials such as binders, fillers, etc., recirculated to contact the feed is from about 1 to about 100 times the total feed rate of oxygenates fed to the reactor. More preferably, the rate of catalyst recirculated to recontact the feed is from about 10 to about 80 times the total feed rate of oxygenates to the reactor, and most preferably from about 10 to 50 times. In a process which includes a separate regenerator, at least a portion of the catalyst in the reactor is desirably removed for regeneration and circulated back to the reactor at a rate of from about 0.1 times to about 10 times the total feed rate of oxygenates to the reactor. Preferably, the rate of recirculation is about 0.2 to 5 times the total feed rate of oxygenates to the reactor, more preferably about 0.3 to 3 times. In a preferred embodiment of the invention, the catalyst from the regenerator is converted to a catalyst comprising an integrated hydrocarbon co-catalyst which may be at least one single ring aromatic compound, and the converted catalyst is sent to the oxygenate reaction zone.

It is desirable to use the olefins produced by this invention to make polyolefins, particularly polyethylene and polypropylene. The olefins produced according to this invention are particularly high in ethylene and propylene content, with a high selectivity to ethylene. The olefins products of this invention are identified by C<sub>2</sub>-C<sub>4</sub> hydrocarbons, including ethylene, propylene and butylene.

The olefins produced by this invention can be easily separated, due to the low amount of undesirable by-products produced, and the separated olefins can be manufactured into polyolefins. Processes for forming polyolefins from olefins are known in the art. Catalytic processes are preferred. Particularly preferred are metallocene, Ziegler/Natta and acid catalytic systems. See, for example, U.S. Patent Nos. 3,258,455; 3,305,538; 3,364,190; 5,892,079; 4,659,685; 4,076,698; 3,645,992; 4,302,565; and 4,243,691, the catalyst and process descriptions of each being expressly incorporated herein by reference. In general, these methods

involve contacting the olefin product with a polyolefin-forming catalyst at a pressure and temperature effective to form the polyolefin product.

A preferred polyolefin-forming catalyst is a metallocene catalyst. The preferred temperature range of operation is between 50 and 240°C and the  
5 reaction can be carried out at low, medium or high pressure, being anywhere within the range of about 1 to 200 bars. For processes carried out in solution, an inert diluent can be used, and the preferred operating pressure range is between 10 and 150 bars, with a preferred temperature range of between 120 and 230°C. For  
10 gas phase processes, it is preferred that the temperature generally be within a range of 60 to 160°C, and that the operating pressure be between 5 and 50 bars.

This invention will be better understood with reference to the following examples, which are intended to illustrate specific embodiments within the overall scope of the invention as claimed.

## 15 **General Experimental Procedure**

### **(a) Catalyst Activity Index**

The catalyst activity index ( $k/k_{ini}$ ) for methanol conversion at 250°C was  
20 determined using the apparatus shown schematically in FIG. 1. The values of  $k_{ini}$  and  $k$  were determined as follows.

50 mg of pre-calcined and activated SAPO-34 catalyst, i.e., Enghardt 14W (Si/Al = 0.19), was loaded into a Pyrex glass tube, 12 mm in o.d. by 120 mm in length. The catalyst was activated by flowing He at 450°C for 1 hour. The glass  
25 tube was attached to a vacuum line and evacuated. The catalyst was dehydrated by heating the catalyst at 250°C for 1 hr in vacuo. The final pressure was generally less than  $10^{-2}$  torr and the final temperature was 250°C.

After dehydration of the catalyst, one pulse of 3 microliter of methanol was passed through the catalyst bed and the conversion of methanol was  
30 determined by analyzing a portion of the products by gas chromatography. Subsequently, additional 3 microliter pulses of methanol were added every six

minutes and the conversion methanol was determined. Assuming a first order reaction kinetics, the rate constant  $k_{ini}$  and  $k$  were proportional to  $-\ln(1 - \text{conversion})$ . Therefore, the catalytic activity index was determined by the following equation:  $k/k_{ini} = \ln(1 - \text{conversion}) / \ln(1 - \text{conversion after first pulse of methanol})$ .

### **(b) Examples**

In the general procedure, SAPO-34 molecular sieve was contacted with acetone, 2-butene, and methanol, respectively. In each case, 1.0 g of calcined catalyst was loaded into a Pyrex glass tube, 12 mm in o.d. by 120 mm in length. The glass tube was attached to a vacuum line and evacuated. The catalyst was dehydrated by heating the catalyst at 200°C for 1 hr in vacuo. The final pressure was generally less than  $10^{-2}$  torr.

After dehydration of the catalyst, the hydrocarbons were contacted with the catalyst at ambient temperature. The exact loading of the hydrocarbons was measured via a capacitance manometer with a loading of 6 wt% on  $\text{CH}_2$  basis. The sample was then isolated from the vacuum line and heated to 300°C and the sample temperature was maintained at 300°C for 0.5 hr. The hydrocarbon content of the catalyst was determined using a LECO C-200 analyzer. Results indicate that there were about 1-3 wt% integrated hydrocarbon co-catalyst on the catalyst in each case.

### **Example 1**

The silicoaluminophosphate molecular sieve generated by the experimental procedure above was analyzed using SSNMR. The SSNMR spectrum was obtained using single-pulse  $^{13}\text{C}$  excitation, with high-power  $^1\text{H}$  decoupling during acquisition.  $\pi/2$  pulses were used for carbon signal excitation, and recycle times between pulses were 20 seconds. Typically, 200 acquisitions (or greater) were signal averaged to obtain the spectrum. Magic-angle spinning

speeds were typically 8 kHz. All chemical shifts are reported relative to TMS at 0 ppm, using external calibration on hexamethylbenzene (17.4 ppm vs. TMS).

The spectrum for acetone-1,2,3-<sup>13</sup>C used as a pretreating hydrocarbon on a SAPO-34 catalyst at 250°C and 260 torr is shown in FIG. 2. There was about 3  
5 wt.% integrated hydrocarbon co-catalyst comprising carbonaceous deposits on the pretreated catalyst following evacuation of the pretreating material. The presence of resolved signals at 134-138 ppm and 19-21 ppm confirm that methyl  
substituted aromatics result from this preparation scheme. In particular, the spectrum demonstrates that a mixture of alkylated single ring aromatic compounds  
10 exist within the silicoaluminophosphate molecular sieve. Chemical shifts for methyl groups observed at 19 and 21 ppm, and aromatic signals at 126, 129, 135 and 138 ppm, support the existence of alkylated aromatic species. Further, the relative integrated intensity of aliphatic region compared to the aromatic region is 0.366. The expected aliphatic to aromatic signal intensity ratio for  
15 trimethylbenzenes is 0.500. Thus, the observed value of 0.366 is indicative of a composition in the silicoaluminophosphate molecular sieve comprising primarily xylenes and tri-methylbenzenes.

The spectra for methanol-<sup>13</sup>C as a pretreating hydrocarbon for a SAPO-34 catalyst is shown in FIG. 3. The top spectrum, labeled "as prepared," shows the  
20 sample pretreated at 300°C and 260 torr, shortly after the evacuation of pretreating hydrocarbon in the pretreating vessel. The relatively large intensity and distribution of aliphatic signals in the 0-50 ppm region accompanied by a relatively large aliphatic to aromatic signal intensity ratio indicates the presence of substantial aliphatic molecules unattached to aromatics in the pores of the  
25 silicoaluminophosphate molecular sieve, and represents the nascent product of the oxygenate conversion reaction at that temperature. The middle spectrum shows the same sample after 1 hour at 450°C in flowing helium at 40 psia in the absence of any pretreating hydrocarbon or oxygenate feed. In these cases, the aliphatics unattached to single ring aromatics have been removed, revealing the single ring  
30 aromatics formed in the silicoaluminophosphate molecular sieve. Longer exposure times in the absence of pretreating materials reduce the aliphatic to



aromatic signal intensity ratio, e.g., in the case of the middle spectrum to the case of the bottom spectrum, indicative of the dealkylation of the single ring aromatic species.

## 5 **Example 2**

The production of light olefins was carried out by mixing 50.0 mg of a selected SAPO with 1.0 gram of silicon carbide. The resulting mixture was then placed in a 0.50 inch (outside diameter) No. 304 stainless steel tubular reactor  
10 having a wall thickness of 0.063 inch. The tubular reactor was wrapped with electrical heating tape. A thermocouple was provided in direct contact with the catalyst for temperature measurement.

Pure methanol feedstock was introduced to the tubular reactor by means of a Valco four-port injection valve with a fixed volume of 3  $\mu$ l concurrently with a  
15 stream of helium diluent. The pressure and temperature employed in the example were 40 psia and 450°C, respectively. The effluent from the tubular reactor following each pulse of methanol was collected using a Valco six-port valve with a 2 ml sample loop. The collected effluent sample was analyzed by gas chromatography (Hewlett Packard 6890) equipped with a flame ionization  
20 detector. The chromatographic column used was a 150 meter, 0.25 mm (i.d.) fused silica capillary column (Model No. Petrocol DH 150). In between the 3  $\mu$ l pulses of methanol feedstock, 50 ml/min of pure helium was run through the reactor at the same conditions. Each point shown in FIGs. 3 and 4 represents the results of the oxygenated conversion reaction for every fifth consecutive pulse of  
25 methanol feedstock across the catalysts examined.

FIG. 4 shows the extent of conversion in an oxygenate conversion reaction with methanol feed at 450°C and 40 psia and WHSV of 25  $\text{hr}^{-1}$  utilizing the catalyst prepared from acetone in Example 1, compared to the same SAPO-34 molecular sieve which does not contain alkylated single ring aromatic compounds  
30 at the same oxygenate conversion reaction conditions. The increase in activity for

methanol conversion for the catalyst of the invention is seen at the initial stages of the reaction.

FIG. 5 shows the selectivity to C<sub>2</sub>-C<sub>4</sub> olefins in the same experiment as described for FIG. 5. The increase in prime olefin selectivity for methanol  
5 conversion for the catalyst of the invention, particularly the increase in ethylene selectivity, is shown to be about 10 wt.% or greater at any point in the experiment.

Having now fully described this invention, it will be appreciated by those skilled in the art that the invention can be performed within a wide range of parameters within what is claimed, without departing from the spirit and scope of  
10 the invention.

Table 1 shows the catalytic activity increase after the SAPO-34 molecular sieve was loaded with a carbonaceous material.

Table 1.

<b>Pretreatment</b>	<b>Activity Increase, <math>k/k_{\text{ini}}</math></b>	<b>Hydrocarbon Material (wt. %)</b>
One pulse of 3 $\mu\text{l}$ methanol at 250°C	1	---
30 pulses of 3 $\mu\text{l}$ methanol at 250°C	45	---
90 pulses of 3 $\mu\text{l}$ methanol at 250°C	115	---
25 pulses of 100 $\mu\text{l}$ propene at 350°C	38	1.9
25 pulses of 100 $\mu\text{l}$ 1-butene at 350°C	67	---
4 pulses of 100 $\mu\text{l}$ 1-butene at 450°C	9	---
5 pulses of 100 $\mu\text{l}$ 1-butene at 350°C and 4 pulses of 100 $\mu\text{l}$ 1-butene at 450°C	40	---
25 pulses of 100 $\mu\text{l}$ 2-butene at 350°C	84	2.0
10 pulses of 1 $\mu\text{l}$ 1-pentene at 350°C	36	1.1
10 pulses of 1 $\mu\text{l}$ 3-hexene at 350°C	24	---

**What Is Claimed:**

- 1           1.       A crystalline silicoaluminophosphate molecular sieve comprising a  
2 porous framework structure and a catalytically active integrated hydrocarbon co-  
3 catalyst,  
4           wherein the silicoaluminophosphate has a catalytic activity index for methanol  
5 conversion at 250°C of at least 2.
- 1           2.       The crystalline silicoaluminophosphate molecular sieve of claim 1,  
2 wherein the silicoaluminophosphate has a catalytic activity index for methanol  
3 conversion at 250°C of at least 10.
- 1           3.       The crystalline silicoaluminophosphate molecular sieve of claim 1,  
2 wherein the catalytically active integrated hydrocarbon co-catalyst is a product of a  
3 reaction of any hydrocarbon having a diameter less than a pore-mouth diameter of the  
4 crystalline silicoaluminophosphate molecular sieve in contact with the porous  
5 framework structure.
- 1           4.       The crystalline silicoaluminophosphate molecular sieve of claim 1,  
2 wherein the catalytically active integrated hydrocarbon co-catalyst comprises 0.1 to  
3 23 weight percent single ring aromatics.
- 1           5.       The crystalline silicoaluminophosphate molecular sieve of claim 3,  
2 wherein the hydrocarbon comprises an oxygenate.
- 1           6.       The crystalline silicoaluminophosphate molecular sieve of claim 1,  
2 wherein the catalytically active integrated hydrocarbon co-catalyst remains active  
3 even after being exposed to air at room temperature for 12 hours or after being  
4 subjected to heating at 450°C for 0.5 hour.
- 1           7.       The crystalline silicoaluminophosphate molecular sieve of claim 1,  
2 wherein the silicoaluminophosphate molecular sieve is selected from the group  
3 consisting of SAPO-5, SAPO-8, SAPO-11, SAPO-16, SAPO-17, SAPO-18, SAPO-  
4 20, SAPO-31, SAPO-34, SAPO-35, SAPO-36, SAPO-37, SAPO-40, SAPO-41,

5 SAPO-42, SAPO-44, SAPO-47, SAPO-56, the metal containing forms thereof, and  
6 mixtures thereof.

1 8. The crystalline silicoaluminophosphate molecular sieve of claim 7,  
2 wherein the silicoaluminophosphate molecular sieve is SAPO-34.

1 9. A catalyst for converting an oxygenate feedstock to an olefin product,  
2 comprising a crystalline silicoaluminophosphate molecular sieve having a porous  
3 framework structure, and a binder, wherein the porous framework structure contains  
4 an active integrated hydrocarbon co-catalyst,  
5 wherein the silicoaluminophosphate has a catalytic activity index for methanol  
6 conversion at 250°C of at least 2.

1 10. The catalyst of claim 9, wherein the silicoaluminophosphate has a  
2 catalytic activity index for methanol conversion at 250°C of at least 10.

1 11. The catalyst of claim 9, wherein the catalytically active integrated  
2 hydrocarbon co-catalyst is a product of a reaction of any hydrocarbon having a  
3 diameter less than a pore-mouth diameter of the crystalline silicoaluminophosphate  
4 molecular sieve in contact with the porous framework structure.

1 12. The catalyst of claim 9, wherein the catalytically active integrated  
2 hydrocarbon co-catalyst comprises 0.1 to 23 weight percent single ring aromatics.

1 13. The catalyst of claim 11, wherein the hydrocarbon comprises an  
2 oxygenate.

1 14. The catalyst of claim 9, wherein the catalytically active integrated  
2 hydrocarbon co-catalyst remains active even after being exposed to air at room  
3 temperature for 12 hours or after being subjected to heating at 450°C for 0.5 hour.

1 15. The catalyst of claim 9, wherein the silicoaluminophosphate molecular  
2 sieve is selected from the group consisting of SAPO-5, SAPO-8, SAPO-11, SAPO-  
3 16, SAPO-17, SAPO-18, SAPO-20, SAPO-31, SAPO-34, SAPO-35, SAPO-36,

4 SAPO-37, SAPO-40, SAPO-41, SAPO-42, SAPO-44, SAPO-47, SAPO-56, the metal  
5 containing forms thereof, and mixtures thereof.

1 16. The catalyst of claim 15, wherein the silicoaluminophosphate  
2 molecular sieve is SAPO-34.

1 17. A method of making an olefin product from an oxygenate feedstock,  
2 comprising:

3 contacting a silicoaluminophosphate molecular sieve having a porous  
4 framework structure with a hydrocarbon at conditions effective to form at least a  
5 integrated hydrocarbon co-catalyst within the porous framework, and

6 contacting the silicoaluminophosphate molecular sieve containing the  
7 integrated hydrocarbon co-catalyst with an oxygenate feedstock under conditions  
8 effective to convert the feedstock to the olefin product,

9 wherein the silicoaluminophosphate has a catalytic activity index for methanol  
10 conversion at 250°C of at least 2.

1 18. The method of claim 17, wherein the silicoaluminophosphate has a  
2 catalytic activity index for methanol conversion at 250°C of at least 10.

1 19. The method of claim 17, wherein the catalytically active integrated  
2 hydrocarbon co-catalyst is a product of a reaction of any hydrocarbon having a  
3 diameter less than a pore-mouth diameter of the crystalline silicoaluminophosphate  
4 molecular sieve in contact with the porous framework structure.

1 20. The method of claim 17, wherein the catalytically active integrated  
2 hydrocarbon co-catalyst comprises 0.1 to 23 weight percent single ring aromatics.

1 21. The method of claim 19, wherein the hydrocarbon comprises an  
2 oxygenate.

1 22. The method of claim 17, wherein the catalytically active integrated  
2 hydrocarbon co-catalyst is remains active even after being exposed to air at room  
3 temperature for 12 hours or after being subjected to heating at 450°C for 0.5 hour.

1           23.     The method of claim 17, wherein the silicoaluminophosphate  
2     molecular sieve is selected from the group consisting of SAPO-5, SAPO-8, SAPO-11,  
3     SAPO-16, SAPO-17, SAPO-18, SAPO-20, SAPO-31, SAPO-34, SAPO-35, SAPO-  
4     36, SAPO-37, SAPO-40, SAPO-41, SAPO-42, SAPO-44, SAPO-47, SAPO-56, the  
5     metal containing forms thereof, and mixtures thereof.

1           24.     The catalyst of claim 23, wherein the silicoaluminophosphate  
2     molecular sieve is SAPO-34.

1           25.     An olefin product made according to the method of claim 17.

1           26.     The olefin product of claim 25 comprising ethylene and propylene.

1           27.     A method of making a polyolefin from an oxygenate feedstock,  
2     comprising:

3                 contacting a silicoaluminophosphate molecular sieve having a porous  
4     framework structure with a hydrocarbon at conditions effective to form at least a  
5     integrated hydrocarbon co-catalyst within the porous framework,

6                 contacting the silicoaluminophosphate molecular sieve containing the  
7     integrated hydrocarbon co-catalyst with an oxygenate feedstock under conditions  
8     effective to convert the feedstock to an olefin product, and

9                 contacting the olefin product with a polyolefin-forming catalyst under  
10    conditions effective to form the polyolefin,

11                wherein the silicoaluminophosphate containing the integrated hydrocarbon co-  
12    catalyst has a catalytic activity index for methanol conversion at 250°C of at least 2.

1           28.     A polyolefin made by the process of claim 27.

1           29.     The polyolefin of claim 28 comprising polyethylene.

1           30.     The polyolefin of claim 28 comprising polypropylene.

1           31.     A crystalline silicoaluminophosphate molecular sieve comprising a  
2     porous framework structure and a catalytically active integrated hydrocarbon co-  
3     catalyst,

4            wherein the catalytically active integrated hydrocarbon co-catalyst is a product  
5 of a reaction of a hydrocarbon in contact with the porous framework.

1            32.     The crystalline silicoaluminophosphate molecular sieve of claim 31,  
2 wherein the hydrocarbon comprises an oxygenate.

1            33.     The crystalline silicoaluminophosphate molecular sieve of claim 31,  
2 wherein the catalytically active integrated hydrocarbon co-catalyst comprises 0.1 to  
3 23 weight percent single ring aromatics.

1            34.     The crystalline silicoaluminophosphate molecular sieve of claim 31,  
2 wherein the catalytically active integrated hydrocarbon co-catalyst is remains active  
3 even after being exposed to air at room temperature for 12 hours or after being  
4 subjected to heating at 450°C for 0.5 hour.

1            35.     The crystalline silicoaluminophosphate molecular sieve of claim 31,  
2 wherein the silicoaluminophosphate molecular sieve is selected from the group  
3 consisting of SAPO-5, SAPO-8, SAPO-11, SAPO-16, SAPO-17, SAPO-18, SAPO-  
4 20, SAPO-31, SAPO-34, SAPO-35, SAPO-36, SAPO-37, SAPO-40, SAPO-41,  
5 SAPO-42, SAPO-44, SAPO-47, SAPO-56, the metal containing forms thereof, and  
6 mixtures thereof.

1            36.     The crystalline silicoaluminophosphate molecular sieve of claim 35,  
2 wherein the silicoaluminophosphate molecular sieve is SAPO-34.

1            37.     A method of making an integrated hydrocarbon co-catalyst,  
2 comprising:  
3            preparing an silicoaluminophosphate molecular sieve having a porous  
4 framework structure and  
5            contacting said silicoaluminophosphate with a hydrocarbon at conditions  
6 effective to form at least said integrated hydrocarbon co-catalyst within the porous  
7 framework,



8            wherein said the silicoaluminophosphate comprising said integrated  
9            hydrocarbon co-catalyst has a catalytic activity index for methanol conversion at  
10          250°C of at least 2.

1            38.      The method of claim 37, wherein said conditions effective to form at  
2            least said integrated hydrocarbon co-catalyst comprises contacting a hydrocarbon  
3            having a diameter less than a pore-mouth diameter of the crystalline  
4            silicoaluminophosphate molecular sieve.

1            39.      The method of claim 38, wherein said contacting comprises first  
2            contacting at a lower temperature and second contacting at a higher temperature.

1            40.      The method of claims 39, wherein a difference between said higher  
2            temperature and said lower temperature is at least 10°C.

1            41.      The method of claims 39, wherein a difference between said higher  
2            temperature and said lower temperature is at least 25°C.

1            42.      The method of claims 39, wherein the hydrocarbon contacted in said  
2            first contacting is different from that contacted in said second contacting.

1            43.      The method of claims 42, wherein a difference between said higher  
2            temperature and said lower temperature is at least 10°C.

1            44.      The method of claims 42, wherein a difference between said higher  
2            temperature and said lower temperature is at least 25°C.

1            45.      The method of claim 37, wherein the silicoaluminophosphate has a  
2            catalytic activity index for methanol conversion at 250°C of at least 10.

1            46.      The method of claim 37, wherein the catalytically active integrated  
2            hydrocarbon co-catalyst comprises 0.1 to 23 weight percent single ring aromatics.

1            47.      The method of claim 37, wherein the hydrocarbon comprises an  
2            oxygenate.

1           48.     The method of claim 37, wherein the catalytically active integrated  
2 hydrocarbon co-catalyst is remains active even after being exposed to air at room  
3 temperature for 12 hours or after being subjected to heating at 450°C for 0.5 hour.

1           49.     The method of claim 37, wherein the silicoaluminophosphate  
2 molecular sieve is selected from the group consisting of SAPO-5, SAPO-8, SAPO-11,  
3 SAPO-16, SAPO-17, SAPO-18, SAPO-20, SAPO-31, SAPO-34, SAPO-35, SAPO-  
4 36, SAPO-37, SAPO-40, SAPO-41, SAPO-42, SAPO-44, SAPO-47, SAPO-56, the  
5 metal containing forms thereof, and mixtures thereof.

1           50.     The catalyst of claim 49, wherein the silicoaluminophosphate  
2 molecular sieve is SAPO-34.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166

**Abstract of the Disclosure**

Disclosed is a crystalline silicoaluminophosphate molecular sieve comprising a porous framework structure and at least one single ring aromatic compound within the porous framework structure. The silicoaluminophosphate molecular sieve is used to convert oxygenate feedstock to olefin product. The olefin product is high in ethylene and propylene content, with a high selectivity to ethylene. The silicoaluminophosphate molecular sieve can be included with a binder and other materials in finished catalyst form.

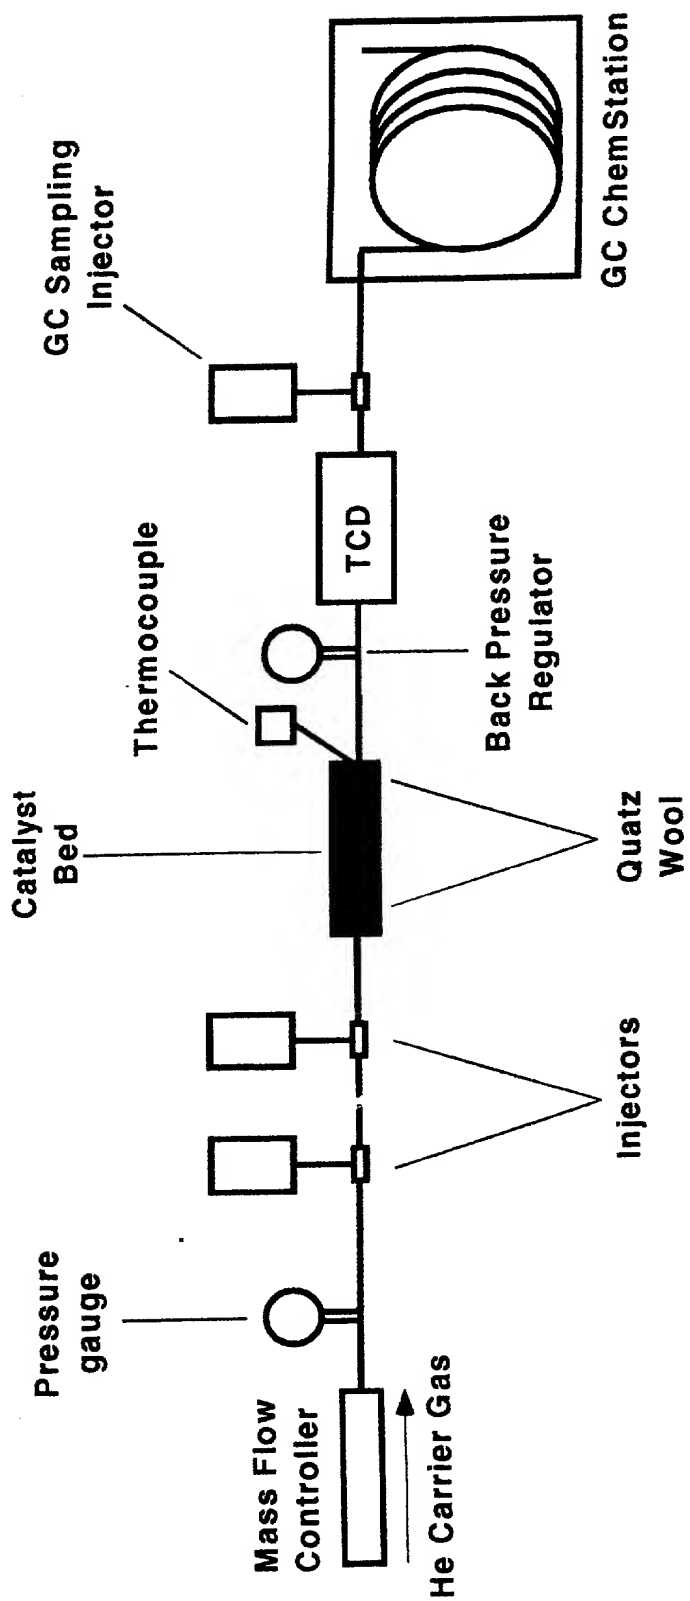


FIG. 1.

Figure 2

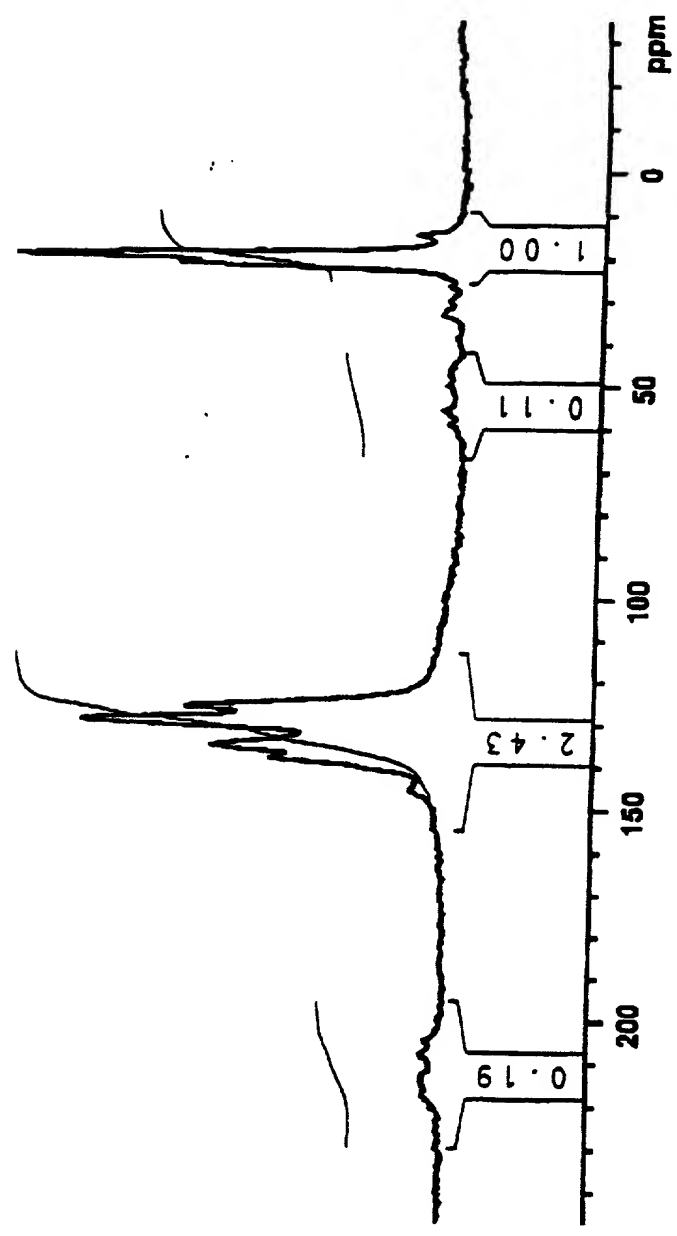
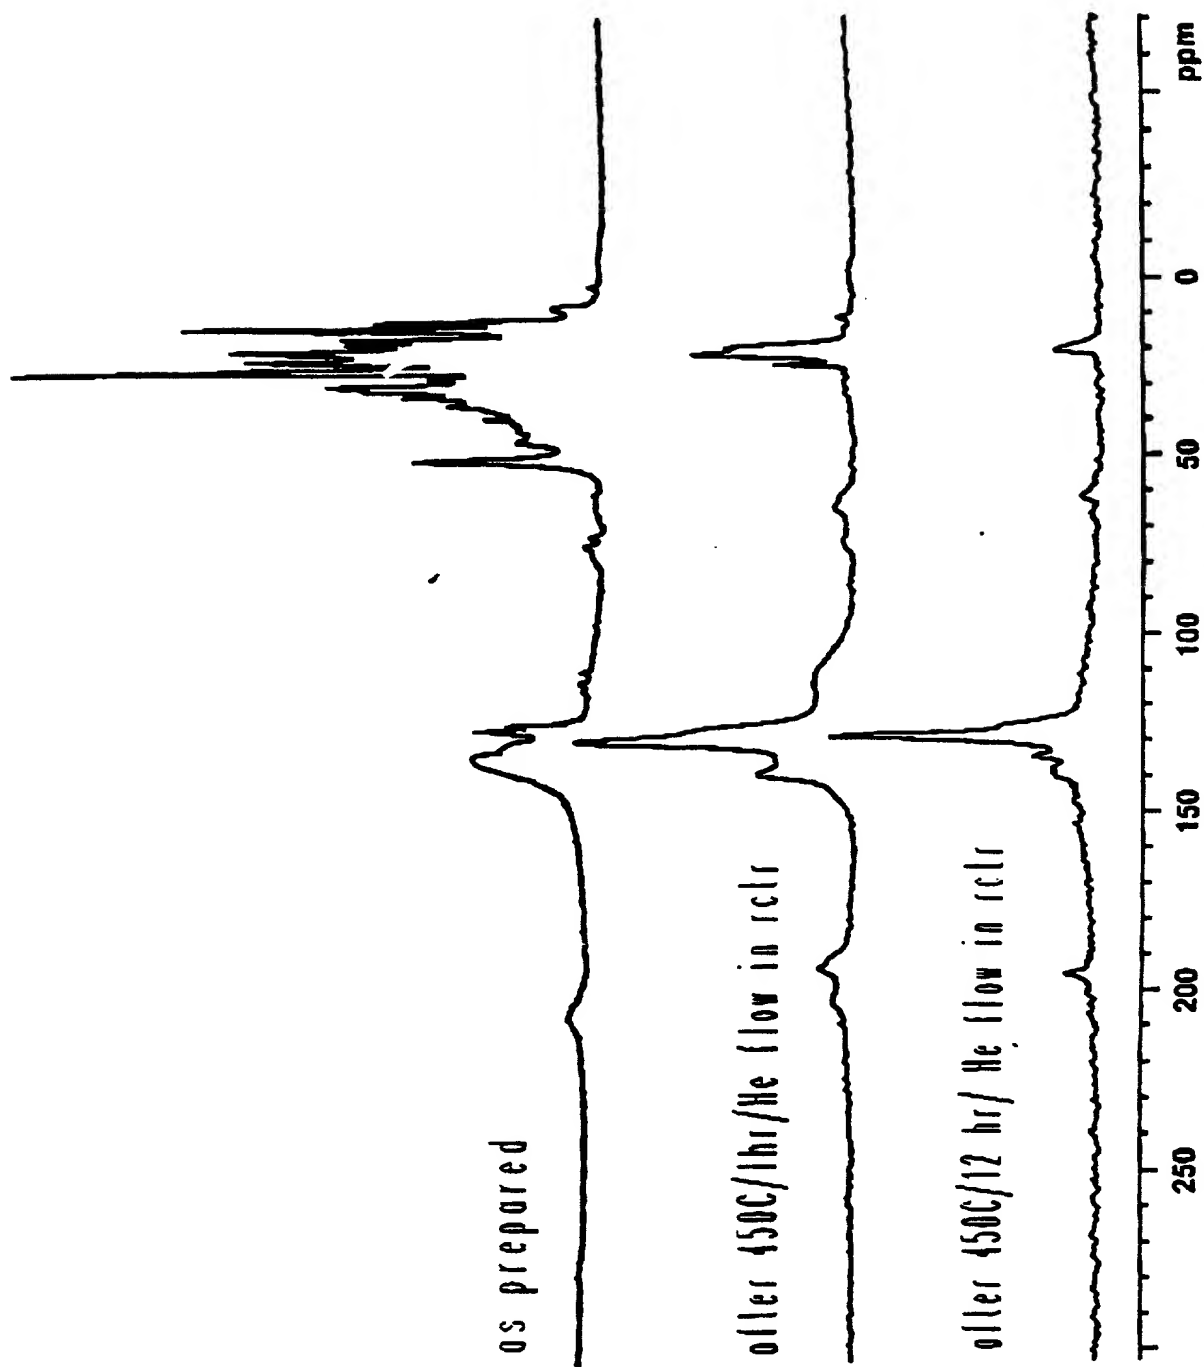


FIGURE 3





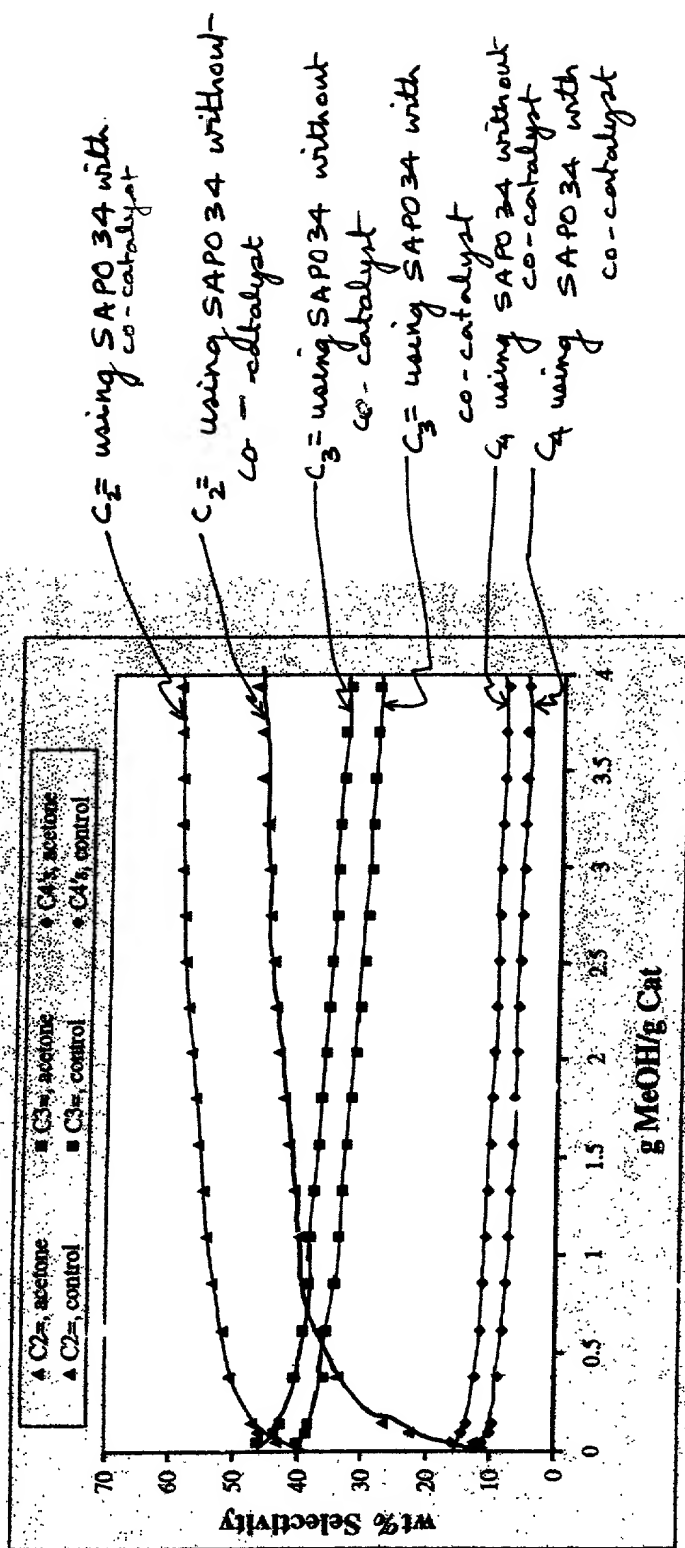


Fig. 5



**DECLARATION FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled  
**CATALYST PRETREATMENT IN AN OXYGENATE TO OLEFINS REACTION SYSTEM**  
 the specification of which is attached hereto unless the following box is checked:

☐ was filed on \_\_\_\_\_ as Application Serial No. or PCT International Application No. \_\_\_\_\_  
 and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate(s), or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application(s) for patent or inventor's certificate(s), or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)Priority Claimed

_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under 35 U.S.C. § 119(e)(1)-(2) of any United States provisional application(s) listed below.

_____	_____
(Application Number)	(Filing Date)
_____	_____
(Application Number)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose material information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status - patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status - patented, pending, abandoned)

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

NAMES	REGISTRATION NUMBERS
Bradley A. Keller	37,654
C. Milton Fick	33,383
James A. Zboray	35,420
Edward F. Sherer	29,588
Andrew B. Griffis	36,336
Blossom Loo	36,858
Douglas J. Collins	43,561
Richard D. Jordan	33,519
Raj S. Davé	42,465
Barry E. Bretschneider	28,055
Richard Lilley	42,803
Thomas D. Mays	34,524

SEND CORRESPONDENCE TO:	DIRECT TELEPHONE CALLS TO: (Name and Telephone Number)
ExxonMobil Chemical Company Law Technology P.O. Box 2149 Baytown, Texas 77522-2149	Bradley A. Keller (281) 834-1978 Facsimile No. (281) 834-2911

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF INVENTOR	LAST NAME XU	FIRST NAME TENG		MIDDLE NAME
RESIDENCE & CITIZENSHIP	CITY HOUSTON	STATE OR FOREIGN COUNTRY TEXAS		COUNTRY OF CITIZENSHIP USA
POST OFFICE ADDRESS	POST OFFICE ADDRESS 1620 BAY AREA BLVD. APT. 506	CITY HOUSTON	STATE OR COUNTRY TEXAS	ZIP CODE 77058

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

FULL NAME OF INVENTOR	LAST NAME WHITE	FIRST NAME JEFFREY	MIDDLE NAME L.	
RESIDENCE & CITIZENSHIP	CITY KINGWOOD	STATE OR FOREIGN COUNTRY TEXAS		COUNTRY OF CITIZENSHIP USA
POST OFFICE ADDRESS	POST OFFICE ADDRESS 5211 SPRING PINE COURT	CITY KINGWOOD	STATE OR COUNTRY TEXAS	ZIP CODE 77345

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_